


NEW

MODULA

Modular LED floodlight

An abstract graphic on the left side of the page shows several light beams originating from a point on the left edge and fanning out towards the right. The beams are represented by overlapping translucent shapes in shades of light beige and light teal. Dashed white lines are drawn across the beams, suggesting a grid or measurement system.

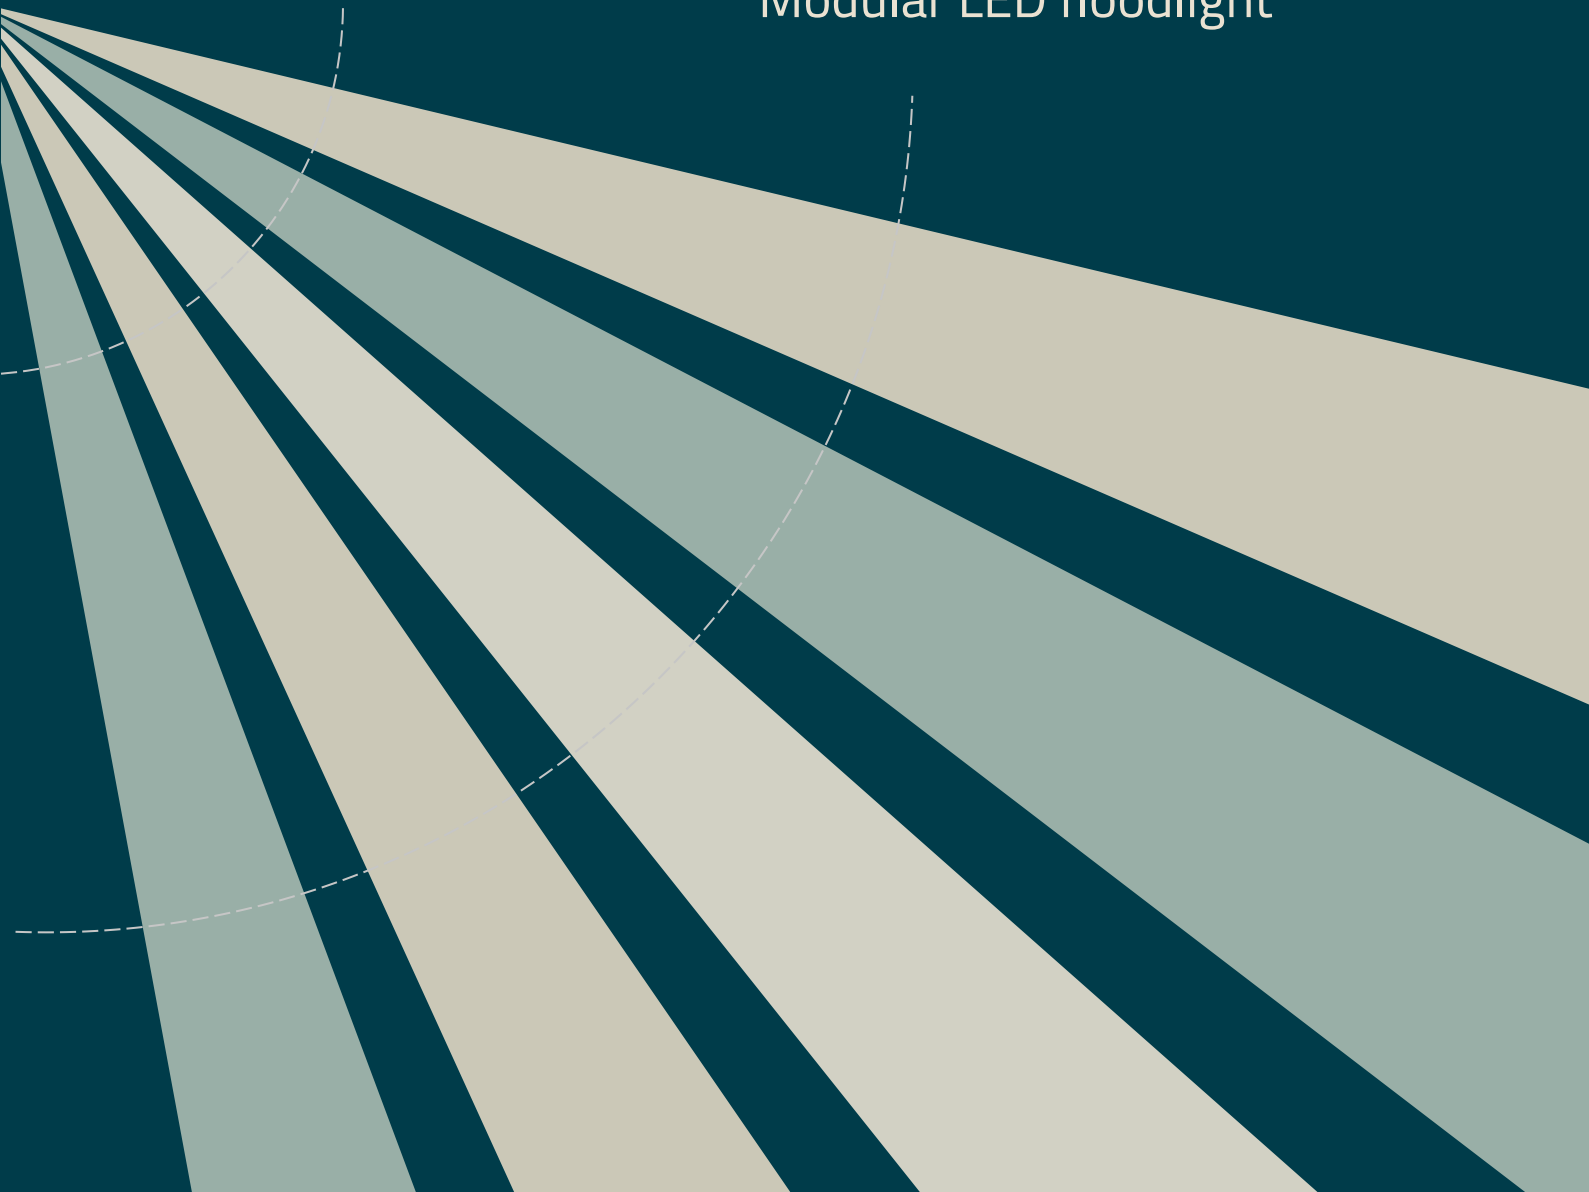

NEW

MODULA 3x2

Extreme power, absolute precision.

Modular LED floodlight, ideal for lighting sports facilities and large areas requiring high-end performance.

TECHNICAL DESCRIPTION

Modular LED floodlight for sport facilities lighting, tunnels and large indoor and outdoor areas, brand **NITEKO**, **MODULA** series, **3x1** model, suitable for various mounting options thanks to a reinforced adjustable bracket for pinpoint light direction, with a (actual) maximum power consumption up to **1,500W**, and power supply of **100-240V A.C. – 50/60Hz**.

Floodlight equipped with **high-power LEDs** powered by a constant current up to a maximum of **500mA**, with a correlated colour temperature of **3,000K** in the standard version, or with optional CCTs of **1,800K, 2,200K, 2,700K, 3,000K, 5.000K**, a colour rendering index (**CRI**) greater than **70** in the standard version, or **CRI>80** or **CRI>90** on request, and a photobiological risk class not exceeding **RG1**.

Light source

Light source efficiency greater than **200 lm/W** (CCT 5,000K / CRI 70) and lifetime, under optimal operating conditions, of:

- Lifespan 100,000 h (L95 B10: $T_a = 25\text{ °C}$; $IF \leq 500\text{mA}$);
- Lifespan 120,000 h (L90 B10: $T_a = 25\text{ °C}$; $IF \leq 500\text{mA}$);
- Lifespan 270,000 h (L80 B10: $T_a = 25\text{ °C}$; $IF \leq 500\text{mA}$);
- Lifespan 450,000 h (L70 B10: $T_a = 25\text{ °C}$; $IF \leq 500\text{mA}$).

Floodlight's luminous flux from **131,910 lm** to **217,066 lm**, with luminous efficacy greater than **140lm/W** (CCT 5,000K / CRI 70) depending on the configuration (number of LEDs and supply current, CCT, CRI, optics) and an energy efficiency rating higher than **A++**.

Power

Fixture with an effective power output of between **1,200** and **1,500W** with 100-240V AC – 50/60Hz power supply. High-efficiency electronic drivers integrated into the electrical compartment of the luminaire, characterised by a power factor greater than **PF>0.95** with a failure rate of less than 12% after 100,000 hours of operation and a minimum efficiency of **90%**.

In the standard version, the power supply unit comes with the following functions:

- Pre-programmed automatic dimming for up to 5 daily time profiles (PRG5);
- Control via a 1–10 V analogue signal (DIM);
- Constant lighting control during the lifetime (CLO.LITE).

Protection

Thermal protection, short-circuit protection and standard surge protection up to **10kV** in common mode and **6kV** in differential mode. On request, the luminaire can be equipped with an **SPD device** integrated into the electrical compartment, providing surge protection up to **10kV, 12kV** or **20 kV**, in both common mode and differential mode.

EOS-free luminaire equipped with specific technical features designed to prevent the formation of parasitic capacitance, thereby minimising damage caused by electrical overstress (EOS).

VOC-free luminaire constructed using non-metallic materials and components with high chemical compatibility with the LED source to prevent the release of volatile organic compounds (VOCs) that could affect performance, stability and colour temperature over time.

Class I insulated floodlight with an **IP66** protection rating and an impact resistance rating of **IK10** (pending), with an operating temperature range of **-40°C** to **+50°C** and a storage temperature range of **-40°C** to **+80°C**, consisting of:

- **6063 extruded** aluminium **modules** with excellent surface finish and high thermal conductivity, RAL9006;
- **supporting frame, bracket** and **electrical box** made from painted die-cast aluminium;
- simplified installation with an **adjustable bracket** that allows for precise and easy aiming;
- **electrical compartment** separate from **optical compartment** and extensive external cooling fins for superior thermal management;
- **tilting adjustment system** with a graduated scale from **-135°** to **+135°** and a **slotted hole** for sliding with a maximum travel of 75mm, complete with a plastic protective cover to preserve the locking screws;
- **supporting frame** that allows for tilting adjustment of the outer LED module rows from **-25°** to **+25°** and **adjustable bracket** from **-90°** to **+90°**;
- high-efficiency modular PMMA optical components assembled on the LED modules using special fixing screws; these can be removed to allow for easy replacement during maintenance;
- **H07RN-F outgoing** multi-pole cable (standard length 1m).


Remote-control

On request, the luminaire can be equipped with a **remote-control** interface integrated into the luminaire body, available in the following versions:

- Control via DALI and DALI2.0 digital signals (DALI/DALI2.0);
- Automatic flux dimming according to pre-programmed settings (CLO-FULL);
- Voltage variation regulation (PLV);
- Power line carrier regulation (LPL);
- Interface with emergency lighting devices (DCE-DIM);
- Radio-frequency control (Nema Socket and Zhaga Socket).

Certifications

This appliance complies with product standards and meets the Minimum Environmental Criteria (CAM) in accordance with Ministerial Decree of 27 September 2017 (Official Gazette No. 244 of 18 October 2017).

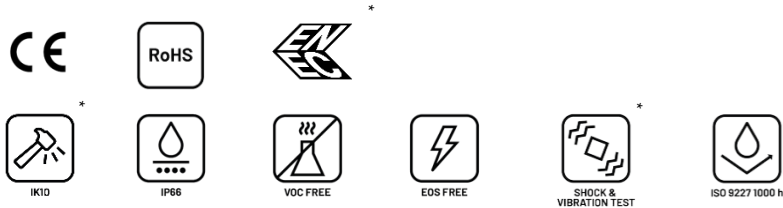

*Pending

TECHNICAL SPECIFICATIONS

MAIN

Features

Luminaire type	LED floodlight
Applications	Lighting of sports facilities, tunnels, industrial and commercial areas, infrastructure, bridges, airports and stations
Brand	Niteko
Series	MODULA
Model	3x2
Mounting	Architectural with adjustable bracket from -135° to +135°, with possible independent tilting of outer LED modules from -25° to +25° and an adjustable bracket rotation from
Effective power	1,200W - 1,500W (Tolerance +5%)
Luminaire efficacy	$\eta_{APP} \geq 140 \text{ lm/W}$ (CCT 5,000K / CRI 70)
Operating temperature	Operating temperature: -40°C to + 50°C; Storage temperature: -40°C to +80°C
Estimated service life	L95 B10: > 100.000 h ($T_a = 25^\circ \text{C}$; $IF \leq 500\text{mA}$); L90 B10: > 120.000 h ($T_a = 25^\circ \text{C}$; $IF \leq 500\text{mA}$); L80 B10: > 270.000 h ($T_a = 25^\circ \text{C}$; $IF \leq 500\text{mA}$); L70 B10: > 450.000 h ($T_a = 25^\circ \text{C}$; $IF \leq 500\text{mA}$);
Certifications	CE, RoHS, ENEC (pending), IP66, IK10 (pending), 1,000h hour salt spray test, photobiological safety, photometric certification, EOS Free, VOC Free, Shock&Vibration Test (pending).

OPTICAL

Features

Light source	High-power LEDs powered by a constant current of less than 500mA
Optical system	Independent and replaceable PMMA LED and optical modules
Source luminous efficacy	3X2 1,200W: 174,353 lm (CCT 5,700K; CRI>70) – 180,076lm (CCT 4,000K; CRI>70); 3X2 1,500W: 200,827 lm (CCT 5,700K; CRI>70) – 226,280lm (CCT 4,000K; CRI>70) (Tolerance: $\pm 7\%$)
Colour temperature	$\eta_{LED} \geq 200 \text{ lm/W}$ (CCT 5,000K / CRI 70)
Colour Rendering Index	Standard: 3.000K; Optional: 1,800K, 2,200K, 2,700K, 4,000K, 5,000K, 5,700K (Tolerance $\pm 2,5\%$)
Photometry	Standard: CRI>70; Optional: CRI>80, CRI>90
Optical Efficiency	Asymmetrical, symmetrical
Photometric classes	80-95%
Photobiological safety	Luminous intensity class G*2; Glare index class D.6
Switch-on/re-switch-on time	Risk class: RG1; IR and UV radiation: absent
Source luminous efficacy	$t_A < 1\text{sec.}$; $t_R < 1\text{sec.}$

ELECTRICAL
Features

Power supply	100/240 V a.c. – 50/60 Hz; Electronic power supplies built into the appliance’s electrical compartment with efficiency $\eta > 95\%$ and power factor $PF > 0.97$ (Active PFC). Available standard functions: - Pre-programmed automatic dimming for up to 5 daily time profiles (PRG5); - Control via a 1–10 V analogue signal (DIM); - Constant lighting control during the lifetime (CLO.LITE).
Electrical connection	Plastic cable gland for the primary power supply cable inlet, control cable inlet, and power supply cable outlet from the wiring compartment
Insulation class	Class I
Electrical protection	Standard: surge protection up to 10kV in common mode and 6kV in differential mode Optional: additional protection with an SPD device built into the electrical compartment, protecting the unit up to 10kV, 12kV or 20 kV, both in CM and DM.


MECHANICAL
Features

Materials	Body: extruded 6063 aluminium; Support frame, bracket and electrical box: painted die-cast aluminium; Optics: high-transparency and high-efficiency PC modules; Gaskets: anti-aging silicone gaskets molded to the body geometry; Screws: A2 stainless steel.
Colour	Standard: RAL 9006; Optional: other RAL colours available on request
Protection rating	IP66; IK10 (pending)
Dimensions and weight	746x485x166mm; 25 kg


LIGHTING FEATURES

PRODUCT ITEM CODE	POWER	NOMINAL LUMINOUS FLUX (xxyy)					
		4070 5070	3070	2270 3580 4080 5080 5780	3080	2270 2780	1870 2790
	W	lm					
MODULA-3X2-1200W-xxyy-15-rr	1.200	187.345	177.106	173.232	161.332	156.534	131.910
MODULA-3X2-1200W-xxyy-45-rr		183.331	173.311	169.520	157.875	153.180	129.083
MODULA-3X2-1200W-xxyy-90-rr		169.762	160.484	156.973	146.191	141.843	119.529
MODULA-3X2-1200W-xxyy-Az-rr		180.076	170.234	166.510	155.072	150.461	126.792
MODULA-3X2-1500W-xxyy-15-rr	1.500	226.280	213.913	209.234	194.861	189.066	159.324
MODULA-3X2-1500W-xxyy-45-rr		221.390	209.290	204.712	190.650	184.980	155.881
MODULA-3X2-1500W-xxyy-90-rr		204.877	193.680	189.443	176.430	171.183	144.254
MODULA-3X2-1500W-xxyy-Az-rr		217.066	205.203	200.714	186.926	181.367	152.836

TECHNICAL DRAWINGS




- a 360 mm
- a1 746 mm
- a2 820 mm
- h 140 mm
- h1 485 mm
- h2 652-727 mm
- h3 166 mm



- b 94 mm
- b1 166 mm
- b2 313 mm

Weight	25,0 kg
Wind exposure surface	
Base	0,48 m ²
Side	0,08 m ²

INTELLIGENT DRIVER




- a 500 mm
- b 150 mm
- h 81 mm

Weight	6,9 kg
--------	--------


PHOTOMETRIC DATA




Asymmetrical



A65 - 130° x 65°
η 100,0% - G*4




A2 - 140° x 45°
η 84,7% - G*4




A3 - 90° x 60°
η 86,7% - G*6




Symmetrical



15 - 15° x 15°
η 100,0% - G*6



45 - 45° x 45°
η 100,0% - G*6




90 - 90° x 90°
η 100,0% - G*6

MODULA 3x2 MODEL



MOUNTING EXAMPLES

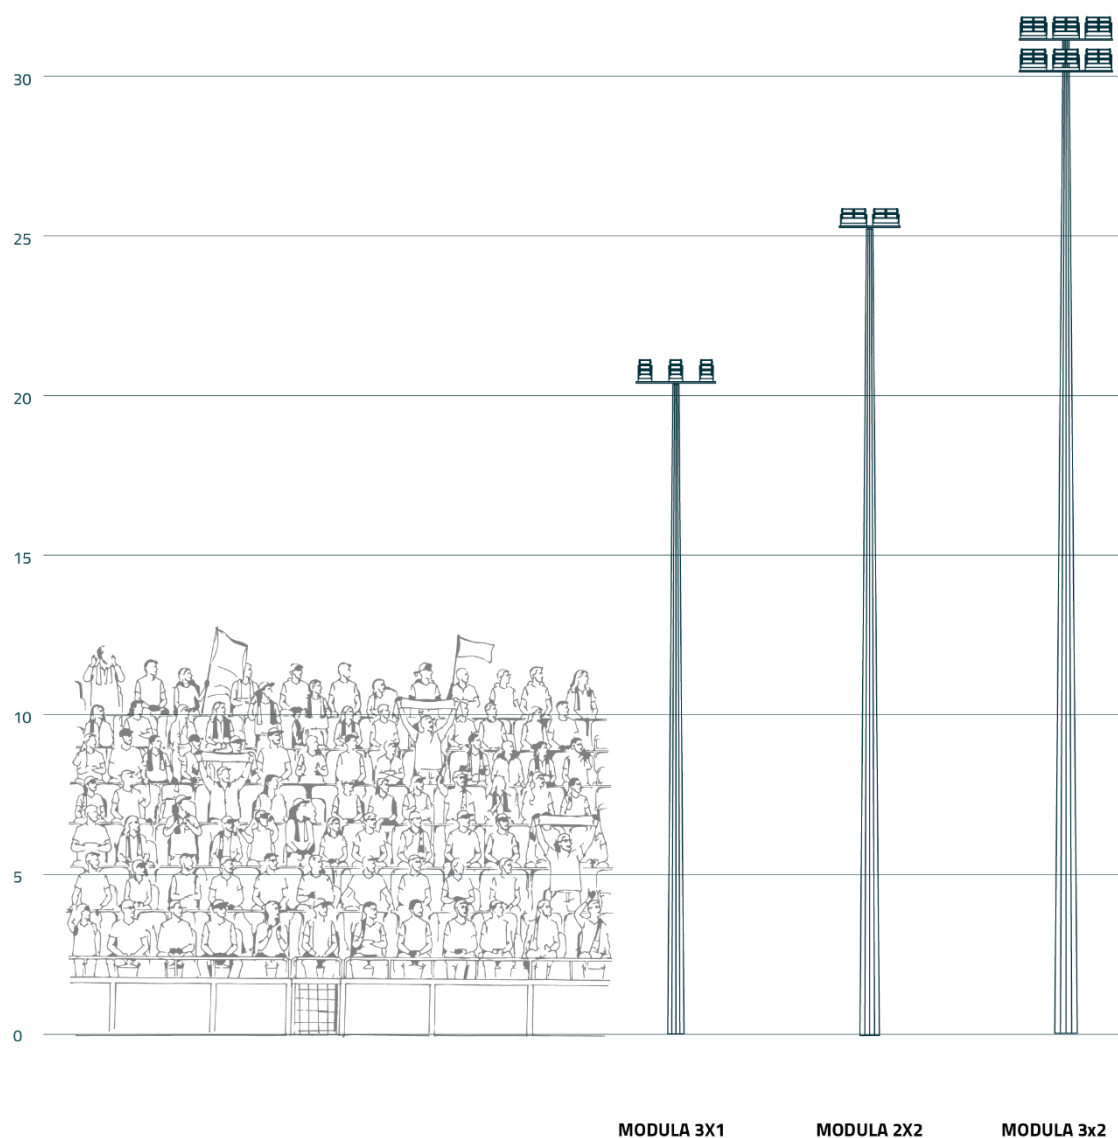

REFERENCE





NITEKO s.r.l.

Viale della Libertà, 8
74020 Montemesola (TA) - Italia
Tel +39 099 567 12 19
Fax +39 099 567 11 12
e-mail info@niteko.com

niteko.com